




HSGQ-G04R

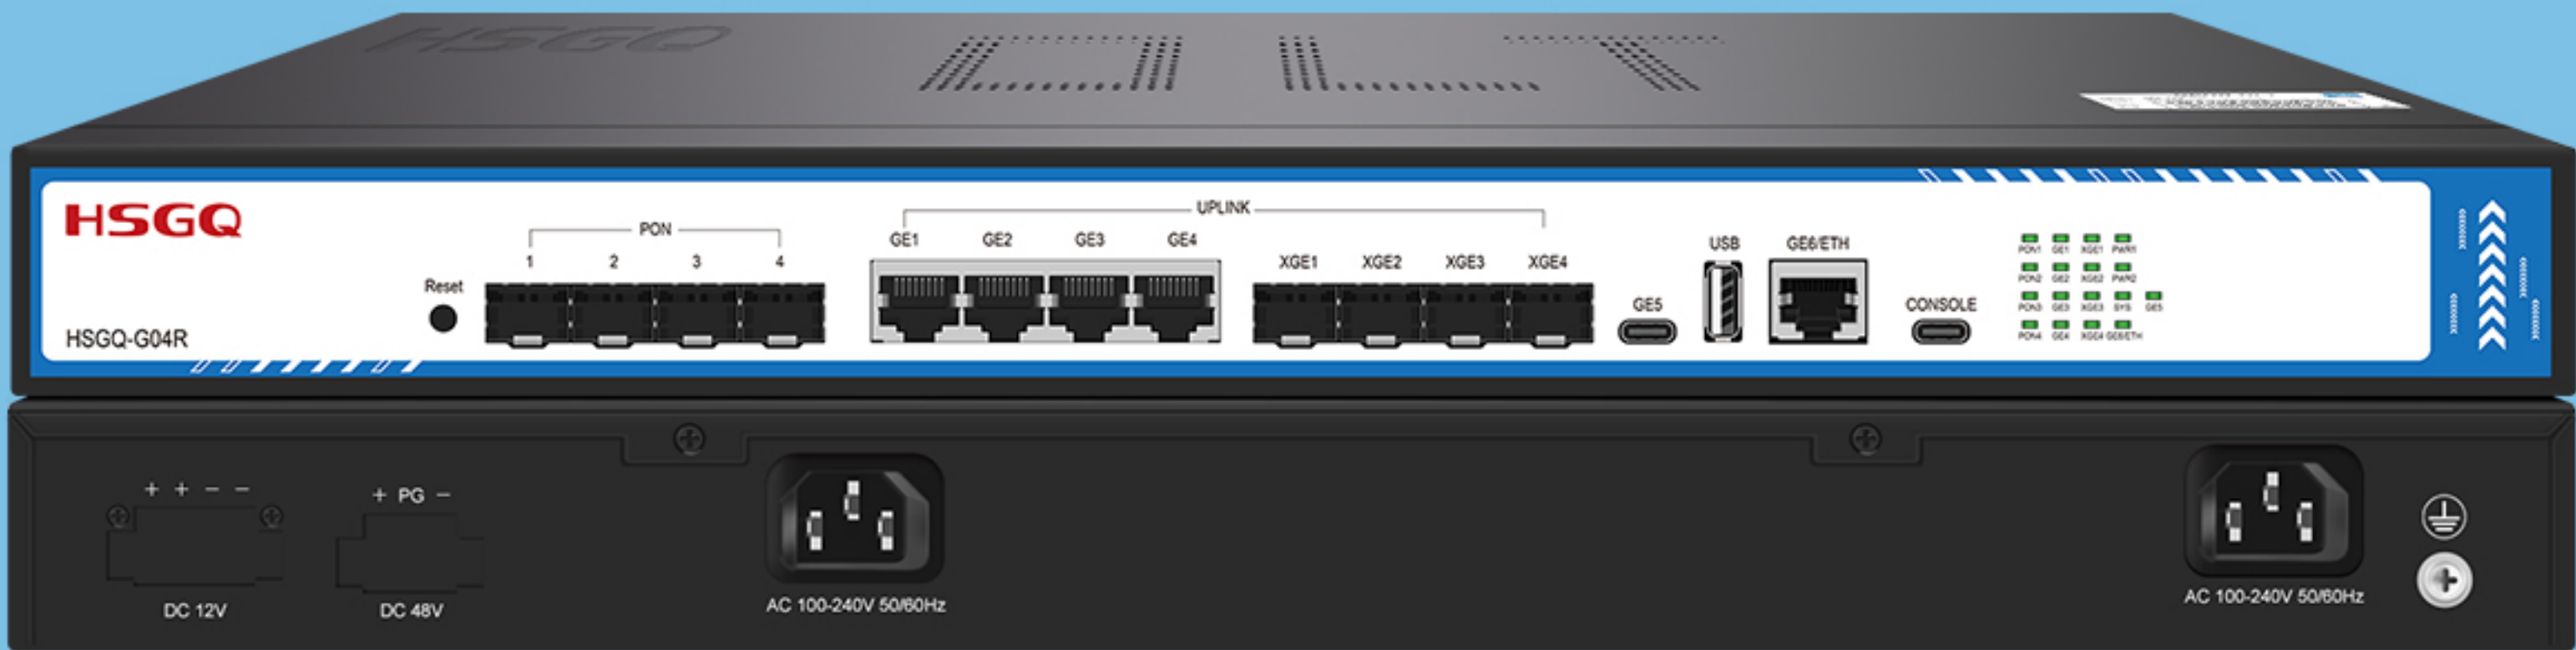

Product Description

HSGQ-G04R is a 1U box-type GPON OLT. The system has good stability and high reliability. It supports multiple management methods such as CLI, WEB, SNMP, etc. The product provides 4*GPON ports, 4*GE RJ45 uplink ports, 4*10G SFP+ slots, 1*GE Type-C port, and 1*GE/ETH combo interface. Customers can deploy, configure, manage and monitor the equipment quickly, easily and remotely via the HSGQ Cloud, greatly reducing the labor and time cost in the network construction process. It is suitable for sparsely populated, remote, cost-sensitive areas, smart industrial parks, commercial buildings, FTTM, etc. Each GPON port supports a maximum split ratio of 1:128, supports up to 512 GPON users, and supports different types of ONUs under different networks. The 1U height is easy to install and maintain. It is an excellent choice for customers to quickly deploy FTTH networks.

Key Features

- 32K MAC address table
- Complete network management functions
- Support flexible DBA, up and down traffic speedcontrol.
- Support IP ToS, IEEE802.1Q
- Support port aggregation
- Support port-based traffic control, traffic shaping
- Support ONU automatic identification, auto-discovery, and auto-registration
- Support the automatic loop-back test function
- VLAN powerful features, including VLAN, QinQ and translation
- Flexible and controllable multicast support, support IGMP snooping
- Support ACL and QoS
- Support Cloud Management

Product Advantages

- Optical link diagnosis: complete warning mechanism
- High reliability: supports dual power supply(Default single power supply)
- Dimension: 1U cassette save space, low power consumption
- Uplink: support electrical and optical modules, can be flexibly configured according to different networking
- Capacity: Each PON supports up to 128 terminals, the whole device supports up to 512 ONUs under full configuration

Product Specifications

Interface	4×GPON
	4×10/100/1000M RJ45
	4×10G SFP+
	1×GE Type-C
	1×USB 2.0
	1×GE/ETH
	ITU-T G.984.2 GPON Class B+/C+/C++
PON SFP	Tx1490nm@2.488Gbps/Rx1310nm@1.244Gbps
	Max Split Ratio 1:128
Switching Capacity	107Gbps
Forwarding Rate	79.61Mpps
Management	ETH/Console (Type-C)
Flash	32MB
DDR	512MB
Dimensions	442mm x 260mm x 44mm
Weight	<5kg
Standards	IEEE802.3(10Base-T)
	IEEE802.3u(100Base-TX)
	IEEE802.3z (1000BASE-X)
	IEEE802.3ab (1000Base-T)
	IEEE802.1q(VLAN)
Environment	Working Temperature: -10℃~55℃
	Storage Temperature: -40℃~85℃
	Humidity: 5% ~ 95% Non condensing

Product Specifications

Power Supply	AC 100-240V 50/60Hz / DC 48V
	Redundancy Design: AC+AC / AC+DC
Power Consumption	<50W
PON Features	DBA/Line/Service/TR069/SIP/Traffic Profile
	ONT Deny List (blacklist)
	Turn Off PON Port
	P2P
	Rough ONT detect
	ONT Batch upgrade
	IPHost
	ONT WAN Configuration(Private)
	ONT Port Configuration(Private)
	PON Transmission data encryption
Cloud Management	Device List
	Project Management
	Version Release
	License Management
	Permission Management
Configuration and Monitoring	CLI,WEB,SNMP,NMS,CLOUD
	Software and bootroom upgrade by TFTP and FTP
	Ping and diagnosis
	User,log, alarm management
L3 Function	Support IPv4/IPv6 Static Route
	Support RIP/RIPNG/OSPF/OSPFV3 Dynamic Route
	Support VRRPv2/VRRPv3
	Support PIM SM/SSM
	Support DHCP Server, DHCP Snooping and DHCP Relay
L3 Function	Support VLAN, QinQ and translation
	Support at most 4094 VLAN
	Support Port mirror
	Support RSTP and MSTP (recover.time <1s)
	Support Link aggregation (recover time <10ms)
	Support Storm control
	Support IGMP Snooping/proxy
	Support MAC Black Hole
	Support Port isolation
	Support ACL access control based on data stream
	QoS based on port, VID, TOS and MAC address

Packing List

Item	Quantity
OLT	1pc
Power Cable	1pc
Installation Accessories	1set
Warranty Card	1pc

For more information, please visit: <http://www.hsgq.com>

